



HORTI

MASTER GreenPower CG T 600W E40 1SL/12

High Pressure Sodium lamp with clear outer bulb, optimized growthlight output and maintenance

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap-Base	E40
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	32,000 hour(s)
Light Technical	
Color Code	220 [CCT of 2000K]
Chromaticity Coordinate X (Nom)	0.533
Chromaticity Coordinate Y (Nom)	0.432
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	142.4 lm/W
Color rendering index (CRI)	26
Arc Length O (Nom)	151 mm
Operating and Electrical	
Power Consumption	618.0 W
Voltage (Nom)	130 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46
Net Weight (Piece)	0.182 kg
Approval and Application	
Mercury (Hg) Content (Nom)	30.0 mg
Energy Consumption kWh/1000 h	680 kWh
Product Data	
Order product name	MASTER GreenPower CG T 600W E40 1SL/12
Full product name	MASTER GreenPower CG T 600W E40 1SL/12
Full product code	871150020202415
Order code	928158809227
Material Nr. (12NC)	928158809227
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500202024


Numerator - Packs per outer box	12
EAN/UPC - Case	8711500202031

Dimensional drawing




Product	D (max)	O	L	C (max)	A
MASTER GreenPower CG T 600W E40 1SL/12	47 mm	151 mm	166 mm	279 mm	205 mm

Photometric data

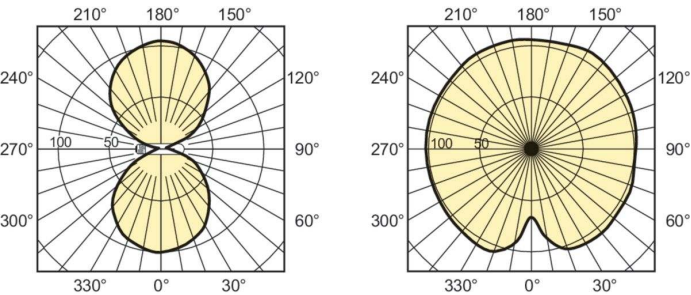


Light Distribution Diagram - MASTER GreenPower CG T 600W E40 1SL/12

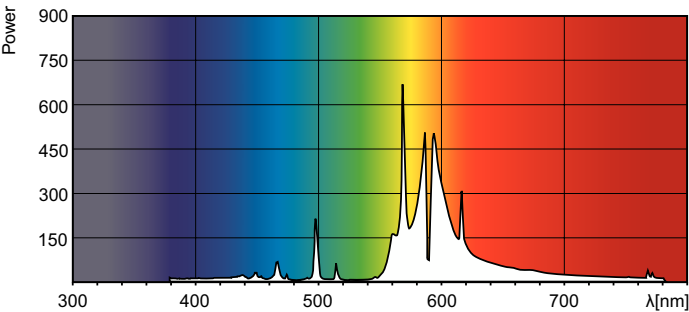


Spectral Power Distribution Colour - MASTER GreenPower CG T 600W E40 1SL/12

Lifetime

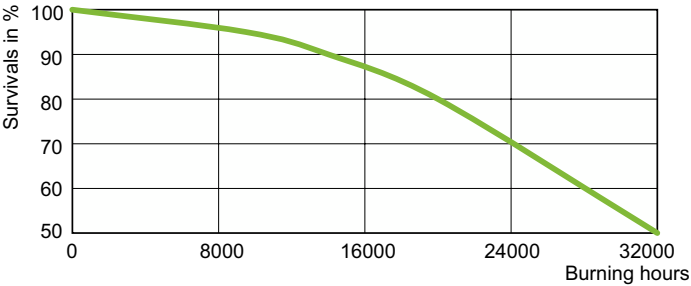

LDLE_SONTHORT_0005-Life expectancy diagram

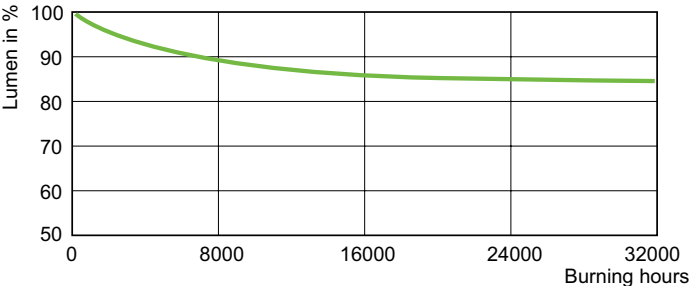

Lumen Maintenance Diagram - MASTER GreenPower CG T 600W E40 1SL/12

